

SCFM = "Cubic ft/min" at Standard Ambient Condition Gauges Sold Separately



Miniature

Ports1/4"
Flow SCFM21



Compact

Ports1/4"-3/8"
Flow SCFM1/4" 53 - 3/8" 80



Standard

Ports1/2"
Flow SCFM130

Filters - Construction

Body Size	Port Size	Poly Bowl
Mini	1/4"	3000

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	1/4"	3010A	
3/8"	3/8"	3020A	3021A

Body Size	Port Size	Poly Bowl
1/2"	1/2"	3030

Parts & Accessories

Body Size	5 µm Element	Poly Bowl	Mounting Bracket
Mini	3062	3073	3076

Parts & Accessories

Body Size	40 µm Element	5 µm Element	Poly Bowl	*Metal Bowl	Mounting Bracket	Auto Drain Kit
3/8"	3066	3063	3074	3079	3071	3060

Parts & Accessories

Body Size	40 µm Element	5 µm Element	Poly Bowl	Mounting Bracket	Auto Drain Kit
1/2"	3067	3064	3075	3072	3060

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Polycarbonate Bowl: 150 psig
Maximum Temperature: 125° F

*Metal bowl available as an accessory.

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Polycarbonate Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature: 125° F

Manual Drain Kit1/2" - 3086

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Polycarbonate Bowl: 150 psig
Maximum Temperature: 125° F

WARNING: Units in this catalog are intended for use in industrial compressed air systems only. Do not use where pressure or temperature may exceed maximum rated operating condition. See specifications. Use metal bowl on applications where a plastic bowl might be exposed to substances that are incompatible with polycarbonate. These filters are not designed for use with fluids other than air, for non-industrial application, or for life support systems.

Gauges

General Purpose Pressure Gauges

Pressed steel case with shatterproof crystal and brass fitting. Used for air, water, oil, or other fluids which are compatible with brass and bronze. Available boxed or in display packs. Nominal accuracy 3-2-3%. 1 pack.

BOTTOM MOUNT

GAUGE Dial Diameter	Pipe Thread	Range PSI	Amflo No.
2"	1/8" NPT	0-300	1011-300
2"	1/4" NPT	0-15	1012-15
2"	1/4" NPT	0-60	1012-60
2"	1/4" NPT	0-160	1012-160
2"	1/4" NPT	0-300	1012-300
2-1/2"	1/4" NPT	0-60	1022-60
2-1/2"	1/4" NPT	0-160	1022-160
2-1/2"	1/4" NPT	0-300	1022-300

BACK MOUNT

GAUGE Dial Diameter	Pipe Thread	Range PSI	Amflo No.
1-1/2"	1/8" NPT	0-60	1101-60
1-1/2"	1/8" NPT	0-160	1101-160
2"	1/8" NPT	0-160	1111-160
2"	1/4" NPT	0-160	1112-160
2"	1/4" NPT	0-300	1112-300
2-1/2"	1/4" NPT	0-160	1122-160

VACUUM GAUGE Dial Diameter

2"	1/4" NPT	0-300	1024-30V
----	----------	-------	----------

*Approximate flow at 90 psig inlet pressure and 5 psid pressure drop.

Gauges Sold Separately




Miniature

Ports1/4"
SCFM15



Compact

Ports1/4"-3/8"
SCFM60

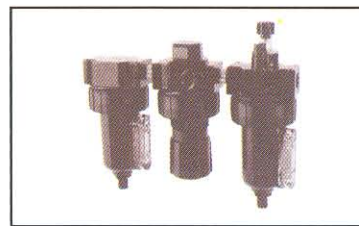

Compact

Ports3/8"
SCFM60

Piggyback Filter/Regulator F-R-L Combination

Body Size	Port Size	Poly Bowl
Mini	1/4"	3300

Parts & Accessories

Body Size	5 µm Element	Poly Bowl	Mounting Bracket	Panel Bowl	Reg. Repair Kit
Mini	3062	3073	3076	3161	3166

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure: 150 psig
Maximum Temperature: 125° F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Body Size	Port Size	Poly Bowl
3/8"	1/4"	3310A
3/8"	3/8"	3320A

Parts & Accessories

Body Size	40 µm Element	5 µm Element	Poly Bowl	*Metal Bowl	Mounting Bracket
3/8"	3066	3063	3074	3269	3162

Body Size	Panel Nut	Auto Drain	Reg. Service Kit
3/8"	3159	3060	3160

*Metal bowl available as an accessory.

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure: 150 psig
Maximum Temperature: 125° F
Gauge Port: 2-1/4" NPT (full flow)
Outlet Range: 5 - 125 psi

Body Size	Port Size	Metal Bowl	Poly Bowl
3/8"	1/4"	3410A†	
3/8"	3/8"		3421A

†Includes gauge and mounting bracket.

Parts & Accessories

Body Size	40 µm Element	5 µm Element	Mounting Bracket	Reg. Repair Kit
3/8"	3066	3063	3071	3167

FILTER

LUBRICATOR

Body Size	Poly Bowl	Metal Bowl	Poly Bowl	Metal Bowl	Panel Nut
3/8"	3074	3079	3285	3269	3159

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/4" NPT (full flow)
Outlet Range: 5 - 125 psi