

Gauges Sold Separately



Miniature

Ports1/4"
SCFM20



Compact

Ports1/4"-3/8"
SCFM50



Standard

Ports1/4"-3/8"-1/2"-3/4"-1"
SCFM.... 70 -150 -425

Filters - Mini, Compact, Modular, Standard

Body Size	Port Size	Poly Bowl	Metal Bowl
Mini	1/4"	4000/56-100	4001
Auto Drain			
Mini	1/4"	4002A	

with Sight Glass

Body Size	Port Size	Poly Bowl	Metal Bowl
1/4"	1/4"	4006	4007
1/4"	3/8"	4026/56-300	4027/56-302-99

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	1/4"	4010A-99	4011A-99
3/8"	3/8"	4020A-99/56-305	4021A-99
3/8"	3/8"		4024A-99
			(w/ auto drain)
1/2"	1/2"	4030/56-308	4031/56-310
1/2"	3/4"	4032	4040

Hi Flow

1"	3/4"		4041*/56-313
1"	1"		4050/56-314

*For Auto Drain order 4046
4096 Manual Drain Kit

Parts & Accessories

Body Size	5 µm Element	Poly Bowl	Metal Bowl	Bowl O-Ring
Mini	4062	4073	4078	4780

with Sight Glass

Mounting Bracket & Panel Nut - 4160

Parts & Accessories

Body Size	40 µm Element	5 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket
1/4"	4087	4088	4056	4057	4760

Semi Auto Drain - 4086

Parts & Accessories

Body Size	40 µm Element	5 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket
3/8"	4066A-99	4063A-99	4074A-99	4079A-99	4071A-99
1/2"	4093	4092	4095	4094	4772
1"	4068	4065		4272	4090

Body Size	Bowl O-Ring	Sight Glass	Auto Drain
3/8"	4782	4277A	4070
1/2"	4783		
1"	4781	4278	4046

Auto Drain - 4060
Manual Drain - 4096

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure -
Transparent Bowl: 150 psig (10.3 bar)
Metal Bowl: 250 psig (17.2 bar)
Maximum Temperature -
Transparent Bowl: 125°F (52°C)
Metal Bowl: 175°F (79°C)

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure -
Transparent Bowl: 150 psig (10.3 bar)
Metal Bowl: 250 psig (17.2 bar)
Maximum Temperature -
Transparent Bowl: 125°F (52°C)
Metal Bowl: 175°F (79°C)

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure -
Transparent Bowl: 150 psig (10.3 bar)
Metal Bowl: 250 psig (17.2 bar)
Maximum Temperature -
Transparent Bowl: 125°F (52°C)
Metal Bowl: 175°F (79°C)

Gauges Sold Separately



Compact

Ports 1/4"-3/8"
Flow SCFM 20



Standard

Ports 3/8"-1/2"
Flow SCFM 75 150



Drip-Legs

Ports 1/2"

Coalescing Filters

Body Size	Port Size	Poly Bowl	Metal Bowl
1/4"	1/4"	4017	4016
1/4"	3/8"	4019	4018

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	1/4"	4012A-99	
3/8"	3/8"	4022A-99	
1/2"	3/8"	4038/56-204	4023
1/2"	1/2"	4033/56-208	4037

Port Size	Poly Bowl	Metal Bowl
1/2"	4034	4035

Parts & Accessories

Body Size	.01 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket	Semi Auto Drain
1/4"	4089	4056	4057	4760	4086

Parts & Accessories

Body Size	.01µm Element	Poly Bowl	Metal Bowl	Mounting Bracket	Rplc. Sight Glass	Bowl O-Ring
1/2"	4097	4095	4094	4772	4278	4783

Parts & Accessories

Port Size	Poly Bowl	Metal Bowl	Auto Drain
1/2"	4074A-99	4079A-99	4060

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig (10.3 bar)
Metal Bowl: 250 psig (17.2 bar)
Maximum Temperature –
Transparent Bowl: 125°F (52°C)
Metal Bowl: 150°F (66°C)

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig (10.3 bar)
Metal Bowl: 250 psig (17.2 bar)
Maximum Temperature –
Transparent Bowl: 125°F (52°C)
Metal Bowl: 150°F (66°C)

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig (10.3 bar)
Metal Bowl: 250 psig (17.2 bar)
Maximum Temperature –
Transparent Bowl: 125°F (52°C)
Metal Bowl: 150°F (66°C)



Miniature

Ports 1/4"
Flow SCFM 20



Compact

Ports 1/4"-3/8"
Flow SCFM 50



Standard

Ports 1/4"-3/8"-1/2"-3/4"-1"
SCFM 70 -150 -425

Regulators

Body Size	Port Size	Without Gauge	With Gauge
Mini	1/4"	4100/4102*	4100D/56-110

Body Size	Port Size	Without Gauge
1/4"	1/4"	4119
1/4"	3/8"	4118

Body Size	Port Size	Without Gauge
3/8"	1/4"	4115A-99/56-341-99 4116-99 w/ panel nut
3/8"	3/8"	4125A-99/56-355 4126-99 w/ panel nut
1/2"	1/2"	4135/56-344
1/2"	3/4"	4145
1"	3/4"	4141
1"	1"	4155/56-346

Parts & Accessories

Body Size	Mounting Bracket	Panel Nut	Reg. Repair Kit	Rplc. Knob
Mini	4160	4161	4166	4790

Parts & Accessories

Body Size	Mounting Bracket w/ Panel	Panel Nut	Reg. Repair Kit	Rplc. Knob
1/4"	4760	4763	4757	4791

Parts & Accessories

Body Size	Mounting Bracket w/Panel	Panel Nut	Reg. Repair Kit	Rplc. Knob
3/8"	4162A-99	4778	4167A	4792
1/2"	4772	4773	4776	4793
1"	4165		4169	Non-Rplc

* Non-Repairable Regulator

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure: 300 psig
Temperature Range –
Mini: 0° to 150°F
All Others: 0° to 175°F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Specifications


Fluid: Compressed Air
Maximum Inlet Pressure: 300 psig
Temperature Range: 0° to 150° F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure: 300 psig
Temperature Range: 0° to 175° F
Gauge Port: 2-1/4" NPT (full flow)
Outlet Range: 5 - 125 psi




Gauges Sold Separately

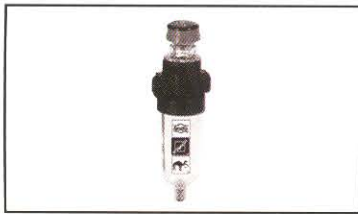

Miniature

Ports1/4"
SCFM.....5

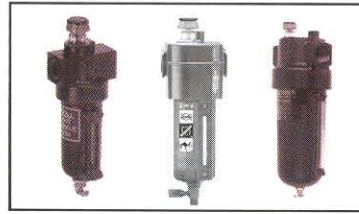

Standard

Ports1/4"-3/8"-1/2"-3/4"-1"
SCFM..... 35 -150 -425

Lubricator - Microfog

Body Size	Port Size	Poly Bowl
Mini	1/4"	4200/56-120

Parts & Accessories

Body Size	Poly Bowl	Metal Bowl	Mount. Bracket	Seal Kit	Fill Plug	Bowl O-Ring
Mini	4264	4269	4160	4171	4794	4780

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F



Compact

Ports1/4"-3/8"
SCFM.....50

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	1/4"	4215A-99/56-376	4214A-99
3/8"	3/8"	4225A-99/56-374	4226A-99
1/2"	3/8"	4219	4218
1/2"	1/2"	4235/56-378	4236/56-380
1/2"	3/4"	4245	4246
1"	1"		4255

Parts & Accessories

Body Size	Poly Bowl	Metal Bowl	Mount. Bracket	Panel Nut	Adj. Dome	Seal Kit	Fill Plug	Bowl O-Ring
3/8"	4265A-99	4269	4071A	N/A	4283		4795	4782
1/2"	4285	4286	4772	4773	4283	4284	4796	4783
1"		4272	4090	N/A	4283		4797	4781

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F



Standard

Ports1/4"-3/8"-1/2"-3/4"-1"
SCFM..... 35 -150 -425

Lubricator - Oil Fog

Body Size	Port Size	Poly Bowl	Metal Bowl
1/4"	1/4"	4232	4233
1/4"	3/8"	4239	4238

Parts & Accessories

Body Size	Poly Bowl	Metal Bowl	Mount. Bracket	Panel Nut	Adj. Dome	Fill Plug
1/4"	4058	4059	4760	4763	4282	4798

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	1/4"	4210A-99	4211A-99
3/8"	3/8"	4220A-99	4221A-99
1/2"	1/2"	4230	4231
1/2"	3/4"	4240	4241
1"	1"	4242	4250

Parts & Accessories

Body Size	Poly Bowl	Metal Bowl	Mount. Bracket	Adj. Dome	Fill Plug	Bowl O-Ring	Drain Kit
3/8"	4265A-99	4270A-99	4071A-99	4282	4795	4782	
1/2"	4285	4286	4772	4282	4796	4783	
1"		4272	4090	4282	4797	4781	4096

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F

Gauges Sold Separately.



Miniature

Ports1/4"
SCFM20



Compact

Ports1/4"-3/8"
SCFM.....50



Standard

Ports1/4"-3/8"-1/2"-3/4"-1"
SCFM..... 75 -150

Piggyback Filter/Regulator

Body Size	Port Size	Poly Bowl
Mini	1/4"	4300/56-357

Parts & Accessories

Body Size	40 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket	Reg. Repair Kit
1/4"	4062	4073	4078*	4160	4166

Body Size	Rplc. Knob	Bowl O-Ring
1/4"	4790	4780

*Replacement metal bowl has an auto drain and no sight glass.

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Body Size	Port Size	Poly Bowl	Metal Bowl
1/4"	1/4"	4312	4314
1/4"	3/8"	4317	4316

Parts & Accessories

Body Size	40 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket	Reg. Repair Kit
1/4"	4087	4056	4057	4760	4757

Body Size	Rplc. Knob
1/4"	4791

Specifications

Fluid: Compressed air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	1/4"	4310A-99	4311A-99
3/8"	3/8"	4320A-99	4321A-99/56-355
1/2"	1/2"	4330/56-355	4331
1/2"	3/4"	4340	4341

Parts & Accessories

Body Size	40 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket	Reg. Repair Kit
3/8"	4066A	4074A-99	4079A-99	4162A-99	4167A
1/2"	4093	4095	4094	4772	4776

Body Size	Rplc. Knob	Bowl O-Ring
3/8"	4792	4782
1/2"	4793	4783

Specifications

Fluid: Compressed air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/4" NPT (full flow)
Outlet Range: 5 - 125 psi

Filters, Regulators, Lubricators

Gauges Sold Separately.



Miniature

Ports1/4"
SCFM.....5



Compact

Ports1/4"
SCFM.....50



Standard

Ports1/4"-3/8"-1/2"-3/4"-1"
SCFM.... 75 -150 425

Regulator - Filter - Lubricator

Body Size	Port Size	Poly Bowl
Mini	1/4"	4405

Parts & Accessories

Body Size	40 µm Element	5 µm Element	Reg. Repair Kit	Rplc Knob	Bowl O-Ring	Fill Plug
Mini	4066A-99	4063A-99	4166	4790	4780	4794

Body Size	FILTERS			LUBRICATOR	
	Poly Bowl	Metal Bowl	Poly Bowl	Metal Bowl	Bowl
Mini	4073	4078	4264	4269	

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Body Size	Port Size	Poly Bowl	Metal Bowl
1/4"	1/4"	4409	4412

Parts & Accessories

Body Size	40 µm Element	Mounting Bracket	Fill Plug	Reg. Repair Kit
1/4"	4087	4759	4798	4757

Body Size	FILTERS			LUBRICATOR	
	Poly Bowl	Metal Bowl	Poly Bowl	Metal Bowl	Bowl
1/4"	4056	4057	4058	4059	

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	1/4"	4410A-99	4411A-99
3/8"	3/8"	4420A-99	4421A-99
1/2"	1/2"	4430	4431
1/2"	3/4"	4440	4441
1"	1"		4450

Parts & Accessories

Body Size	40 µm Element	5 µm Element	Mount. Bracket	Reg. Repair Kit	Fill Plug	Rplc Knob
3/8"	4066A-99	4063A-99	4071A-99	4167A	4795	4782 4792
1/2"	4093	4092	4770	4776	4796	4783 4793
1"	4068	4065	4165	4169	4797	4781

Body Size	FILTERS			LUBRICATOR	
	Poly Bowl	Metal Bowl	Poly Bowl	Metal Bowl	Bowl
3/8"	4074A-99	4079A-99	4265A-99	4269	
1/2"	4095	4094	4285	4286	
1"		4272		4272	

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/4" NPT (full flow)
Outlet Range: 5 - 125 psi

Gauges Sold Separately.



Compact

Ports1/4"
SCFM 50



Standard

Ports1/4"-3/8"-1/2"-3/4"
SCFM..... 75 -150

Combination Units Filter - Regulator

Body Size	Port Size	Poly Bowl	Metal Bowl
1/4"	1/4"	4512	4513

Parts & Accessories

Body Size	40 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket	Reg. Repair Kit	Rplc. Knob
1/4"	4087	4056	4057	4759	4757	4791

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure – Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature – Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	1/4"	4510A-99	
3/8"	3/8"	4520A-99	
1/2"	1/2"	4530	4531
1/2"	3/4"	4540	4541

Parts & Accessories

Body Size	40 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket	Reg. Repair Kit	Bowl O-Ring	Rplc. Knob
3/8"	4060A	4074A-99	4079A-99	4071A-99	4167A	4782	4792
1/2"	4093	4095	4094	4770	4776	4783	4793

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure – Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature – Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/4" NPT (full flow)
Outlet Range: 5 - 125 psi



Compact

Ports1/4"
SCFM 50



Standard

Ports3/8"-1/2"-3/4"
SCFM..... 75 -150

Combination Regulator - Lubricator

Body Size	Port Size	Poly Bowl	Metal Bowl
1/4"	1/4"	4609	4612

Parts & Accessories

Body Size	40 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket	Reg. Repair Kit	Rplc. Knob	Fill Plug
1/4"	4087	4056	4057	4759	4757	4791	4798

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure – Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature – Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	3/8"	4620A-99	4621A-99
1/2"	1/2"	4630	
1/2"	3/4"	4640	4641

Parts & Accessories

Body Size	40 µm Element	Poly Bowl	Metal Bowl	Mounting Bracket	Reg. Repair Kit	Body Size	Rplc. Knob	Bowl O-Ring
-----------	---------------	-----------	------------	------------------	-----------------	-----------	------------	-------------

3/8"	4066A-99	4265A-99	4269	4162A	4167A	3/8"	4792	4795	4782
1/2"	4093	4285	4286	4770	4776	1/2"	4793	4796	4783

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure – Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature – Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/4" NPT (full flow)
Outlet Range: 5 - 125 psi

Filters, Regulators, Lubricators

Gauges Sold Separately.



Compact

Ports1/4"-3/8"
SCFM50



Standard

Ports1/4"-3/8"-1/2"-3/4"
SCFM 75 -150

Regulator/Filter - Lubricator

Body Size	Port Size	Poly Bowl	Metal Bowl
1/4"	1/4"	4709	4712

Body Size	Port Size	Poly Bowl	Metal Bowl
3/8"	1/4"	4710A-99	4711A-99
3/8"	3/8"	4720A-99	4721A-99
1/2"	1/2"	4730	4731
1/2"	3/4"	4740	4741

Parts & Accessories

Body Size	40 µm Element	Mounting Bracket	Reg. Repair Kit	Rplc. Knob	Fill Plug
1/4"	4087	4760	4757	4791	4798

Body Size	FILTER		LUBRICATOR	
	Poly Bowl	Metal Bowl	Poly Bowl	Metal Bowl
1/4"	4056	4057	4058	4059

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi

Parts & Accessories

Port Size	40 µm Element	Mounting Bracket	Reg. Repair Kit	Rplc. Knob	Bowl O-Ring	Fill Plug
3/8"	4066A-99	4162A-99	4167A	4792	4782	4795
1/2"	4093	4770	4776	4793	4783	4796

Port Size	FILTER		LUBRICATOR	
	Poly Bowl	Metal Bowl	Poly Bowl	Metal Bowl
3/8"	4074A-99	4079A-99	4265A-99	4269
1/2"	4095	4094	4285	4286

Specifications

Fluid: Compressed Air
Maximum Inlet Pressure –
Transparent Bowl: 150 psig
Metal Bowl: 250 psig
Maximum Temperature –
Transparent Bowl: 125°F
Metal Bowl: 175°F
Gauge Port: 2-1/8" NPT (full flow)
Outlet Range: 5 - 125 psi