





NETTING

SW Series Standard Duty Tubular Sleeve-Web® Netting

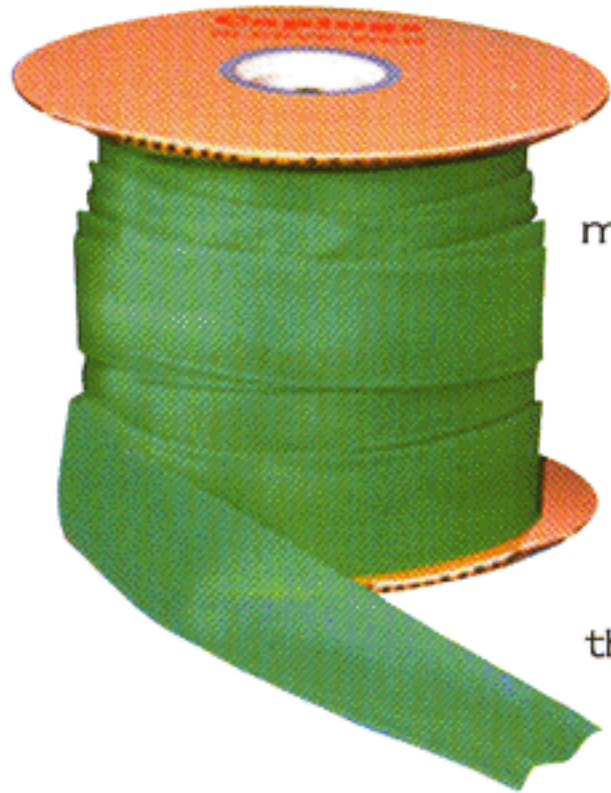


Standard Duty Sleeve-Web provides low-cost protection against physical damage to exterior surfaces of machined, polished, plated, coated, or threaded cylindrical parts. Its elasticity ensures a snug fit and a nonslip grip on straight-sided parts and those with tapered or varying contours. Web thickness is approximately .070" (1.78 mm).

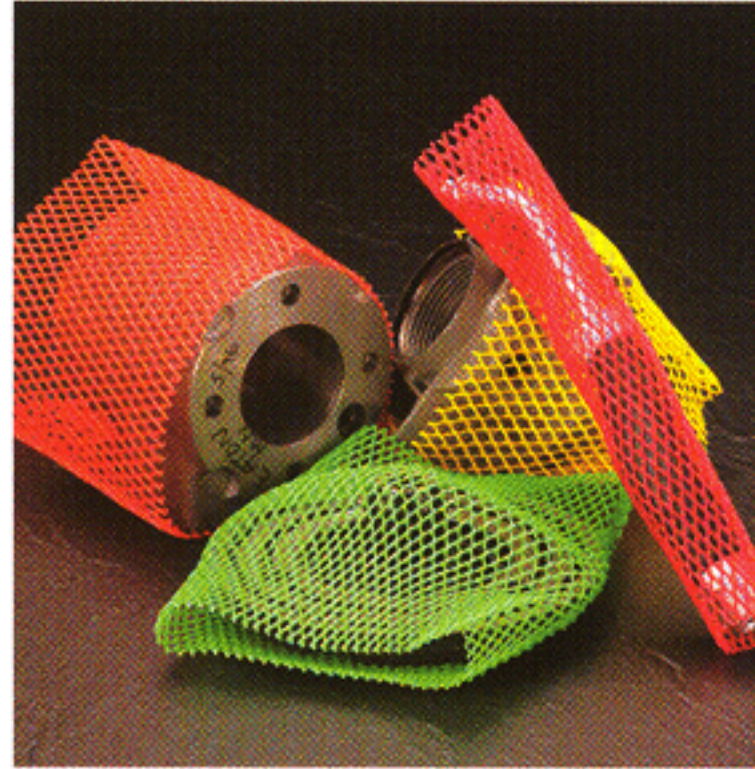

MATERIAL: Low Density Polyethylene
COLOR*: See table on page 125

SW Series Light Duty Tubular Sleeve-Web® Netting

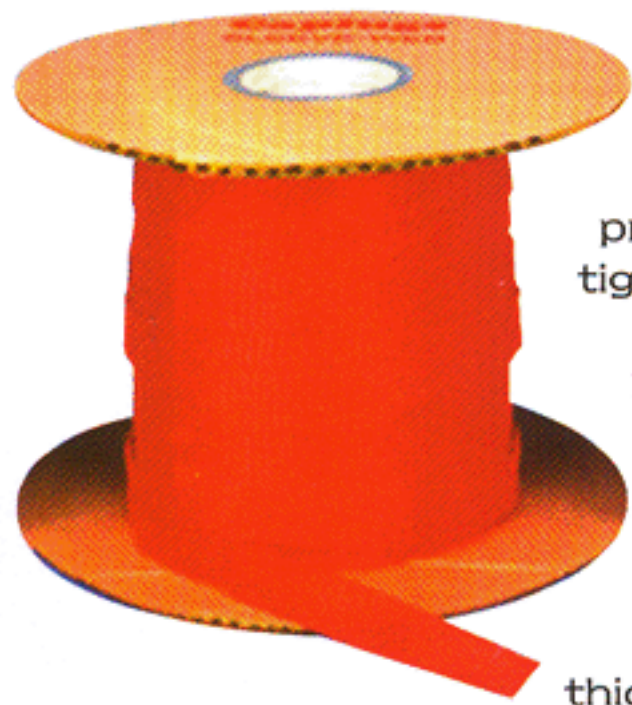

Light Duty Sleeve-Web provides light duty protection. Ideal for irregular-shaped parts, it stretches easily to twice its diameter, while its elastic properties allow it to pull tightly around the smaller sections. Provides inexpensive, attractive, easily applied wrapping for long, narrow items such as wires, glass rods, tubing, and rolled paper. Web thickness is approximately .060" (1.52 mm).



MATERIAL: Low Density Polyethylene
COLOR*: See table on page 125

SW Series Heavy Duty Tubular Sleeve-Web® Netting



Heavy Duty Sleeve-Web has a thicker extrusion, more strands, and closer spacing. It offers an extra measure of protection for valuable precision components like heavy duty truck parts, screw cylinders, spline shafts, couplings, roller bearing assemblies, pistons, and heavy threaded fittings. Eliminates the high cost and time-consuming labor associated with traditional protective wrappings like paper, cardboard, styrofoam or wood. Web thickness is approximately .080" (2.03 mm).



MATERIAL: Low Density Polyethylene
COLOR*: See table on page 125

NETTING



SW Series

To Fit Outside Diameter		Color Code	Standard Coil 42-48lb (19-22kg) Shipping Wt.		Mini Coil 9-11lb (4-5kg) Shipping Wt.		Caplug No.
			Coil		Coil		
in	mm		ft	m	ft	m	
1/4 to 3/8	6.35 - 9.53	Orange	3500	1066	700	213.0	SW-03
3/8 to 3/4	9.53 - 19.05	Green	3000	914	600	180.0	SW-04
1/2 to 1	12.70 - 25.40	Blue	2750	840	550	170.0	SW-05
1 to 1 1/2	25.40 - 38.10	Red	1700	520	340	100.0	SW-10
1 1/2 to 2	38.10 - 50.80	Black	900	270	180	55.0	SW-15
2 to 2 1/2	50.80 - 63.50	White	800	240	160	50.0	SW-20
2 1/2 to 3	63.50 - 76.20	Yellow	600	180	120	35.0	SW-25
3 to 4	76.20 - 101.60	Green	450	140	90	30.0	SW-30
4 to 5	101.60 - 127.00	Orange	350	110	70	20.0	SW-40
5 to 6	127.00 - 152.41	Natural	250	80	50	15.2	SW-50
6 1/4 to 7 1/2	158.76 - 190.51	Blue	250	80	50	15.2	SW-64
7 1/2 to 9	190.51 - 228.61	Red	200	60	40	12.2	SW-75
9 to 10	228.61 - 254.01	Yellow	200	60	40	12.2	SW-90

SW Series

To Fit Outside Diameter		Color Code	Standard Coil 33-38lb (15-17kg) Shipping Wt.		Mini Coil 7-8lb (3-4kg) Shipping Wt.		Caplug No.
			Coil		Coil		
in	mm		ft	m	ft	m	
3/4 to 2	19.05 - 50.80	Yellow	1500	460	300	90.0	SW-075-22
1 1/4 to 3	31.75 - 76.20	Blue	1000	300	200	60.0	SW-125-22
2 to 4	50.80 - 101.60	Red	800	240	160	50.0	SW-200-22
4 to 8	101.60 - 203.21	Blue	600	180	120	35.0	SW-400-22
6 to 12	152.40 - 304.80	Natural	200	60	40	12.2	SW-600-22

SW Series

To Fit Outside Diameter		Color Code	Standard Coil 33-38lb (15-17kg) Shipping Wt.		Mini Coil 7-8lb (3-4kg) Shipping Wt.		Caplug No.
			Coil		Coil		
in	mm		ft	m	ft	m	
1/2	12.70	White	2000	610	400	120	SW-050-66
3/4	19.05	Orange	1500	460	300	90	SW-075-66
1	25.40	Black	1200	370	240	75	SW-100-66
1 1/4	31.75	Green	1000	300	200	60	SW-125-66
1 1/2	38.10	Yellow	800	240	160	50	SW-150-66
1 3/4	44.45	Grey	600	180	120	35	SW-175-66
2	50.80	Blue	500	150	100	30	SW-200-66
2 1/2	63.50	Red	500	150	100	30	SW-250-66
3	76.20	Natural	450	135	90	27	SW-300-66