





CAPS non-threaded

DCC Series Static Dissipative and Conductive Protectors for D-Subminiature Connectors

DCC Series Caplugs are designed to provide electrostatic discharge protection of rectangular D-Subminiature input/output-type connectors. Molded with an integral flange to enable easy application and removal, Series DCC is available in either black conductive polyethylene or pink static dissipative ethylene vinyl acetate.

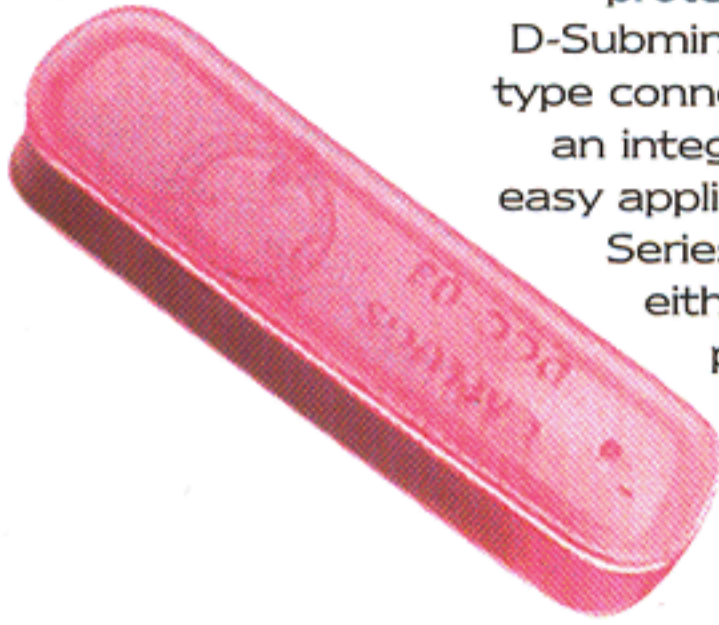


MATERIAL: Static Dissipative Ethylene Vinyl Acetate or Conductive Polyethylene
COLOR: Pink or Black

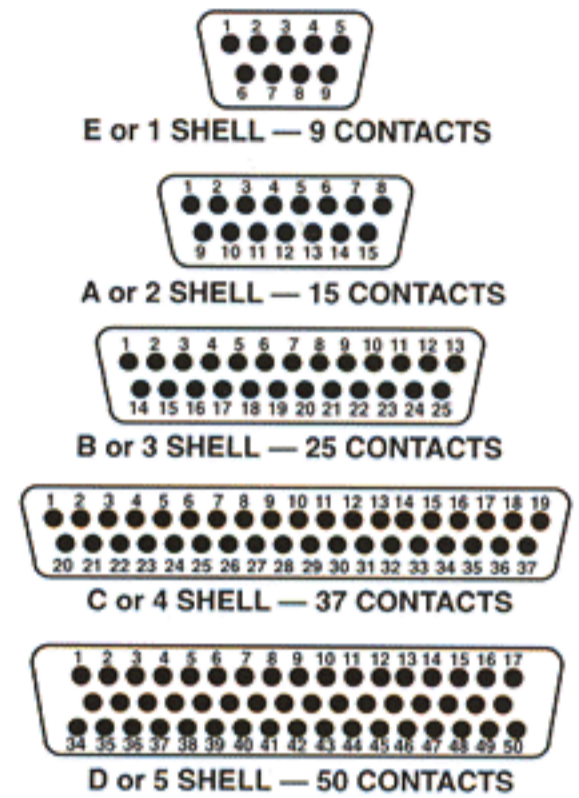


EMC Series Static Dissipative and Conductive Protectors for Electro Miniature Connectors

EMC Series Caplugs fit 68-pin SCSI connectors and 50-pin Champ-type connectors. Series EMC is available in either black conductive polyethylene or pink static dissipative ethylene vinyl acetate.

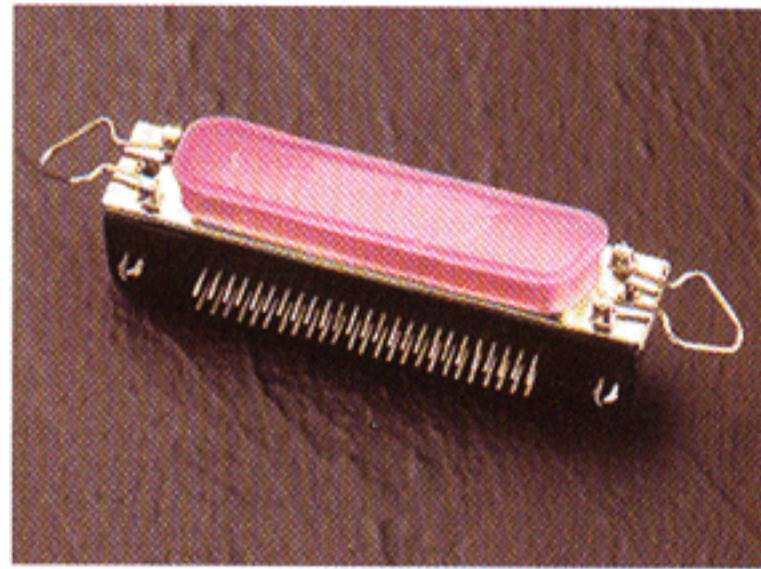


MATERIAL: Static Dissipative Ethylene Vinyl Acetate or Conductive Polyethylene
COLOR: Pink or Black

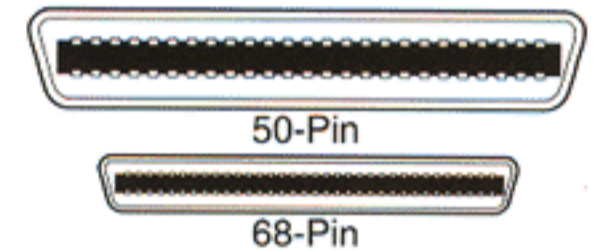


DP Series Conductive Caps

DP Series Conductive Caplugs are designed to dissipate electrostatic charges, provide mechanical protection and an electrical shielding for ITT Cannon-style connectors commonly used in aerospace and military applications.

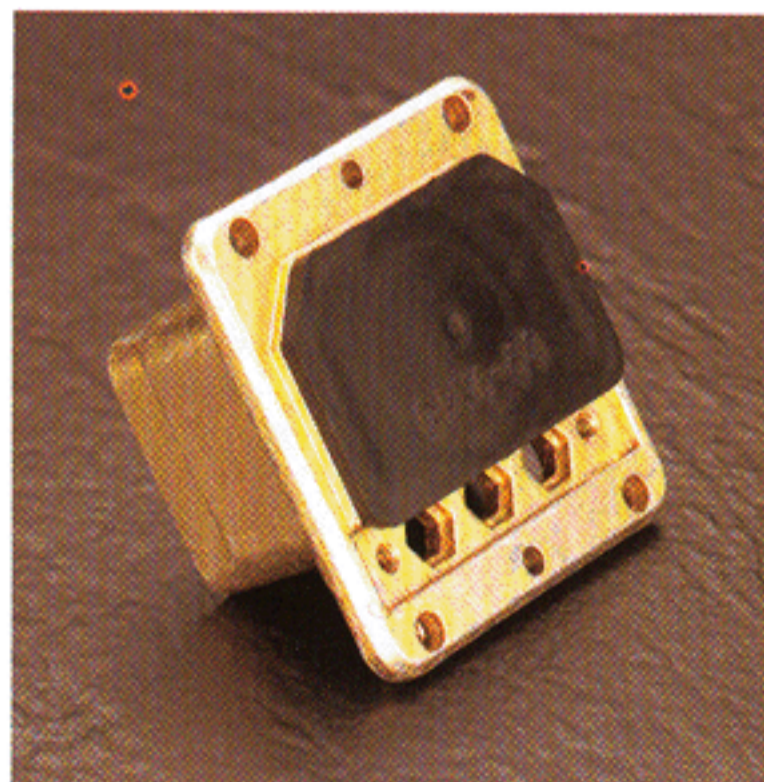

MATERIAL: Conductive Polyethylene
COLOR: Black

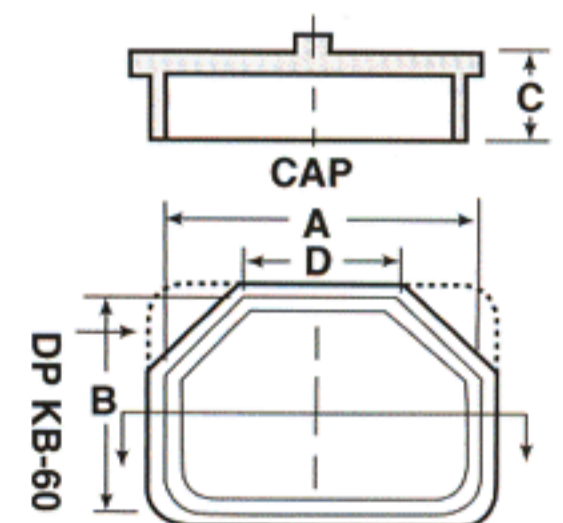



DCC Series

Dimensions		Packaging				Caplug No.
		Standard Carton**		No. of Pieces	Mini Pak Quantity	
Standard No. of Contacts*	Contact Type	Shipping Wt. (Approx.)				No. of Pieces
		lbs	kgs			
9	Socket	7	3.1	5000	1000	DCC-01
9	Pin	7	3.1	5000	1000	DCC-11
15	Socket	11	4.9	5000	1000	DCC-02
15	Pin	11	4.9	5000	1000	DCC-12
25	Socket	17	7.6	5000	1000	DCC-03
25	Pin	17	7.6	5000	1000	DCC-13
37	Socket	19	8.6	5000	1000	DCC-04
37	Pin	19	8.6	5000	1000	DCC-14
50	Socket	20	9.0	4000	800	DCC-05
50	Pin	20	9.0	4000	800	DCC-15

*fit "high density" and "double density" connectors. ** All DCC Static Dissipative Caplugs are packaged in static dissipative poly bags.

EMC Series

Dimensions		Packaging				Caplug No.
		Standard Carton**		No. of Pieces	Mini Pak Quantity	
Standard No. of Contacts*	Contact Type	Shipping Wt. (Approx.)				No. of Pieces
		lbs	kgs			
50	Receptacle	20	9.07	1000	200	EMC-50
68	Receptacle	20	9.07	5000	1000	EMC-68

*fit "high density" and "double density" connectors. ** All EMC Static Dissipative Caplugs are packaged in static dissipative poly bags.

DP Series

Dimensions								Packaging				Caplug No.
								Standard Carton		Mini Pak Quantity		
A		B		C		D		Shipping Wt. (Approx.)			No. of Pieces	Mini Pak Quantity
in	mm	in	mm	in	mm	in	mm	lbs	kgs			
1.611	40.92	.981	24.92	.67	17.02	1.14	28.96	6	2.72	500	100	DP XA-59
3.351	85.12	.990	25.15	.57	14.73	-	-	6	2.72	200	40	DP KB-60