


"Cyclone" Hydrostatic Sight Feed Lubricator

For Use On Stationary Engines and Steam Pumps

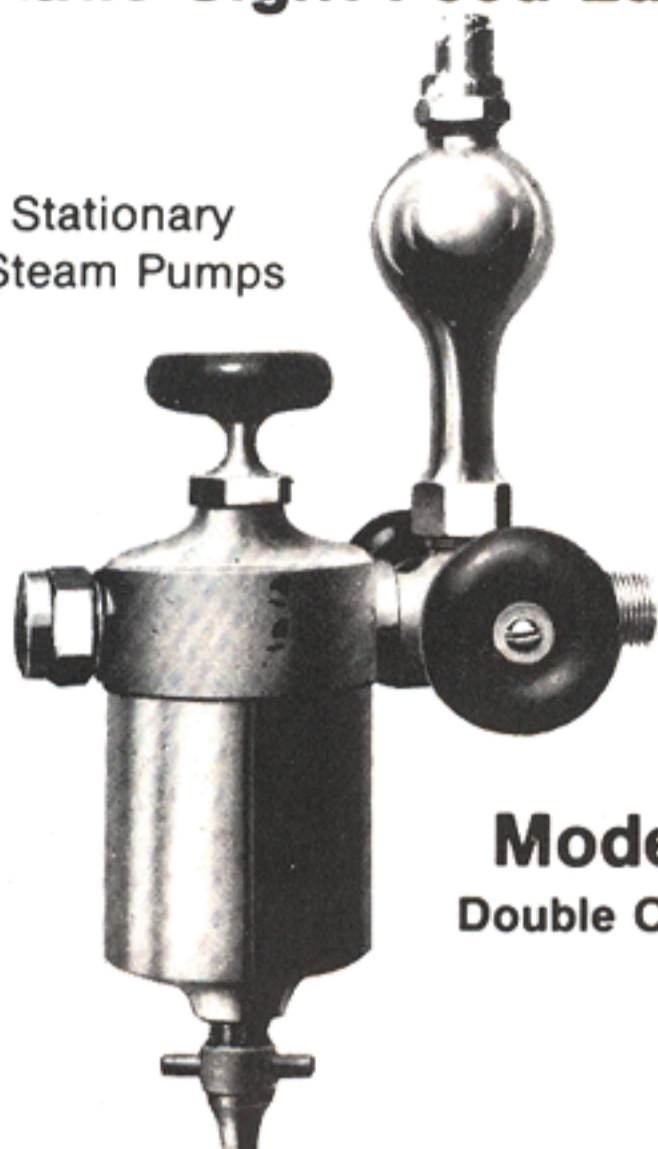

Model 10L
Double Connection

Class M

Model No.	10L3	10L4	10L6
Size For Cylinder	1/2 Pint 10 to 12 in.	1 Pint 12 to 18 in.	1 Quart 18 to 30 in.
Pipe Thread on Support Arm, in.	3/8	1/2	1/2

"Brownie" Sight Feed Lubricator

Hydrostatic, Steam Chest Type



For Steam Engines
Cylinders, Steam Pumps,
Portable Engines,
Traction Engines.


Model 40L

The Brownie is a strongly made, simply constructed Lubricator which screws directly into the steam chest. It is as easily attached as the common Plain Engine Lubricator, and as it has a down drop Sight Feed Feature, the rate of feed of the oil can be intelligently regulated.

Model No.	40L2	40L3	40L4	40L6
Capacity, Pints	1/3	1/2	1	2
Thread on Shank	3/8	1/2	1/2	1/2

Hydrostatic Sight Feed Lubricator

For Steam Engines, Steam Pumps, Etc.

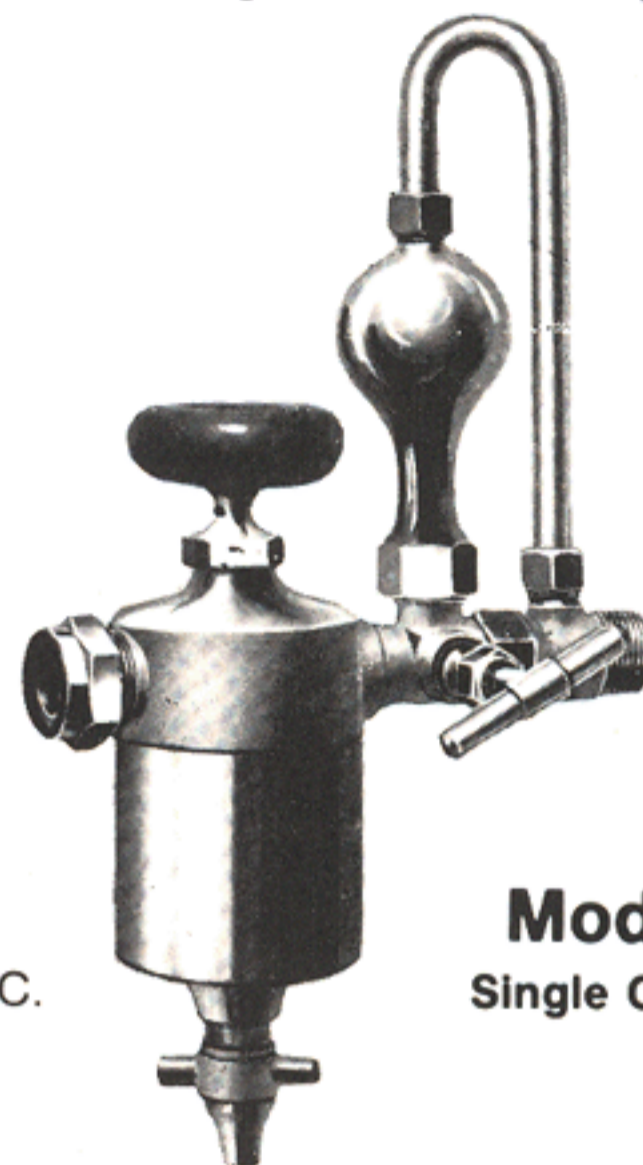

Model 20L
Single Connection

Class F. S. C.

For Installation Where Conditions Will Not Permit Use of Our Double Connection Type


We recommend the use of a double connection lubricator wherever possible, as it is naturally more positive in operation and works more freely than a lubricator having one connection for both receiving condensation and discharging oil. Except in rare cases, however, single connection lubricators will give satisfactory service.

Model No.	20L3	20L4	20L6
Capacity in Pints	1/2	1	Quart
Thread on Support Arm	3/8	1/2	1/2

Plain Engine Lubricators

For Steam Pumps and Steam Engines

Fig. 90
Plain

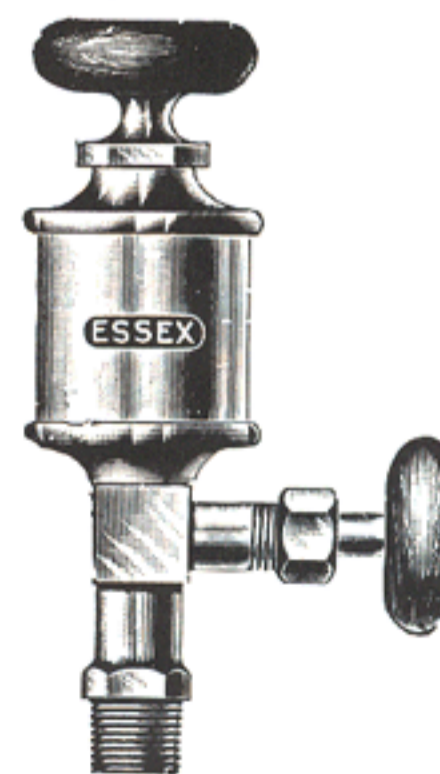


Number	1	3	5	6	7
Diameter, inches	1 1/2	2	2 1/2	3	3 1/2
Capacity, ounces	1 1/4	2 1/2	5	10	18
Pipe Thread, inches	3/8	1/2	1/2	3/4	3/4



**Brass
Oil Cups**

**Fig. 9
Plain**

Number	00	0	1	2	3	4	5	7
Outside Diam., inches	5/8	3/4	7/8	1	1 1/4	1 1/2	1 3/4	2
Shank Pipe Thread, each	1/8	1/8	1/8	1/4	1/4	3/8	3/8	1/2

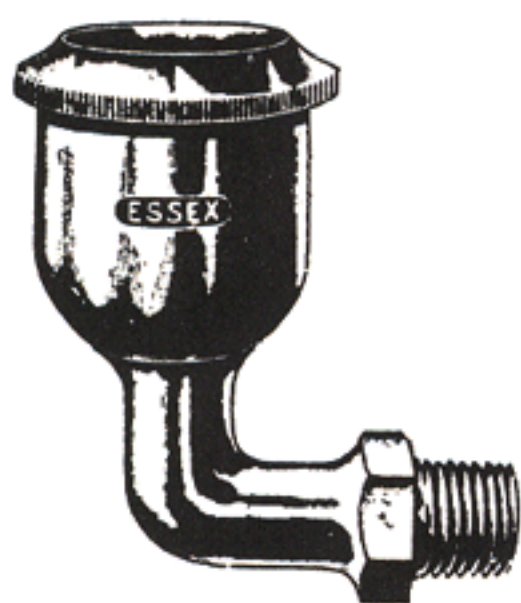

**Fig. 93
with Elbow Shank**

Both Styles Are Regularly Furnished Without Wick. Tube and Wick Available on Request.

Fig. 93 Carried in Sizes 1-3-5 Only

Sight Feed Lubricator

For Gas Engines,
Air Compressors, Blowers, Etc.
**BULL'S EYE TYPE
(Not for Steam)**

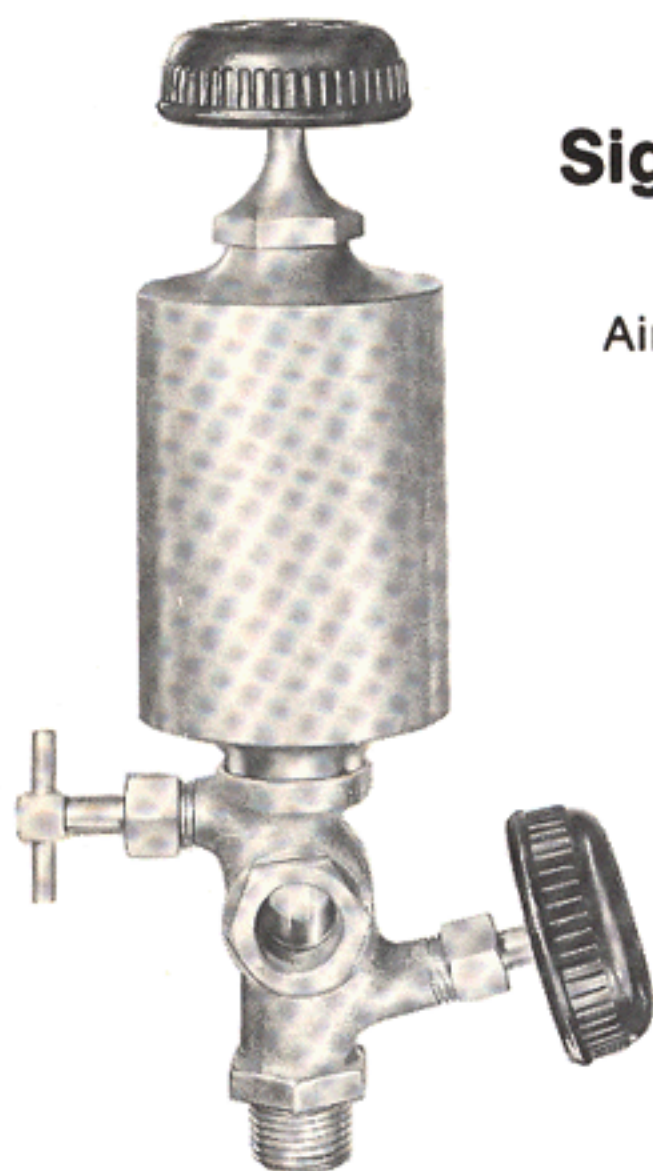


Fig. 42

Size	No. 0	No. 2	No. 4	No. 5
Diameter of Oil Chamber, inches	1 1/2	2	2 1/2	3
Capacity, ounces	1	1/8 Pt.	1/3 Pt.	1/2 Pt.
Shank Pipe Thread, inches	3/8	3/8	1/2	1/2

"Wolverine" Sight Feed Lubricator

Glass Body, Cast Brass Trimmings
For Gas Engines, Air Compressors,
Glass Bottle Machines, Etc.

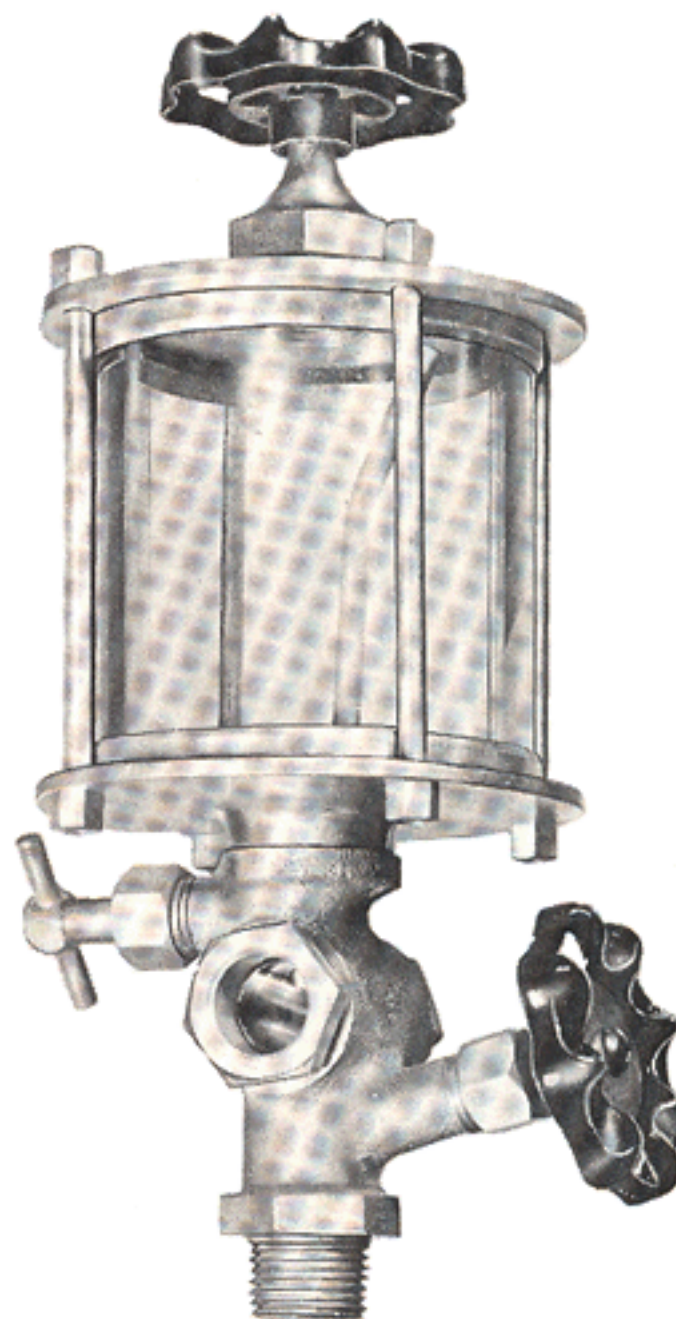


Fig. 60

Size	No. 3	No. 4	No. 5	No. 6	No. 7
Outside Diameter of Glass, inches	2 1/4	2 1/2	3	3 1/2	3 1/2
Height of Glass, inches	2 1/8	2 3/8	3	4	8
Capacity, ounces	4	5	10	Pint	Quart
Shank Pipe Thread, inches	3/8	3/8	1/2	1/2	1/2