


# FFS SERIES "316" STAINLESS STEEL – FLUSH FACE COUPLINGS

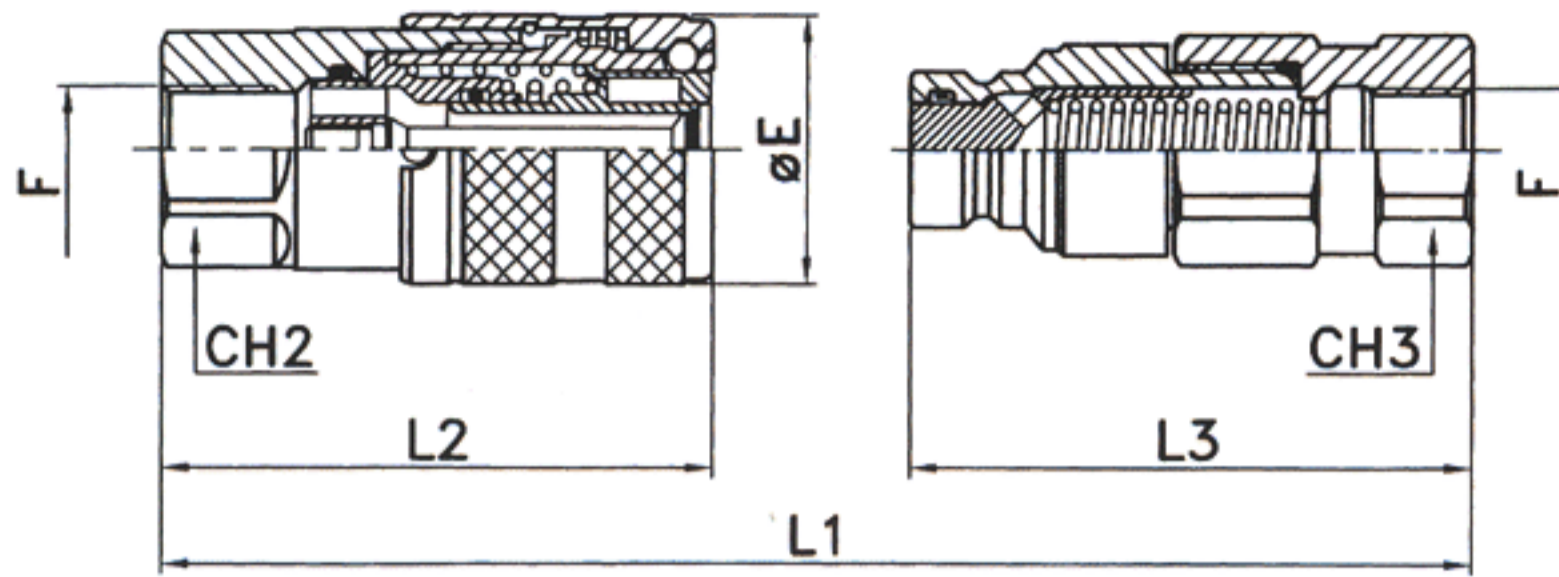

DIRECT INTERCHANGE TO:	
NAME	SERIES
PARKER	FS
FASTER	2 FFI-2
HOLMBURY	FL


COUPLER PART NUMBER	PLUG PART NUMBER	ISO SIZE	NOMINAL SIZE	THREAD F	CH2	CH3	ØE	L1	L2	L3
FFS04-N14F	FFS04-N14M	6.3	1/4"	1/4" NPTF	.86	.86	1.10	3.94	2.32	2.05
FFS04-B14F	FFS04-B14M	6.3	1/4"	1/4" BSPP	.86	.86	1.10	3.94	2.32	2.05
FFS04-S916F	FFS04-S916M	6.3	1/4"	9/16-18 UNF	.86	.86	1.10	3.94	2.32	2.05
FFS06-N38F	FFS06-N38M	10	3/8"	3/8" NPTF	1.18	1.18	1.26	4.76	2.87	2.52
FFS06-B38F	FFS06-B38M	10	3/8"	3/8" BSPP	1.18	1.18	1.26	4.64	2.87	2.40
FFS06-N12F	FFS06-N12M	10	3/8"	1/2" NPTF	1.18	1.18	1.26	4.76	2.87	2.52
FFS06-B12F	FFS06-B12M	10	3/8"	1/2" BSPP	1.18	1.18	1.26	4.64	2.87	2.40
FFS06-S34F	FFS06-S34M	10	3/8"	3/4-16 UNF	1.18	1.18	1.26	4.64	2.87	2.40
FFS08-N34F	FFS08-N34M	12.5	1/2"	3/4" NPTF	1.42	1.42	1.50	5.35	3.15	2.87
FFS08-B34F	FFS08-B34M	12.5	1/2"	3/4" BSPP	1.42	1.42	1.50	5.35	3.15	2.87
FFS08-S1116F	FFS08-S1116M	12.5	1/2"	11/16-12 UNF	1.42	1.42	1.50	5.59	3.30	2.95
FFS10-N34F	FFS10-N34M	16	5/8"	3/4" NPTF	1.42	1.42	1.65	5.39	3.23	2.87
FFS10-B34F	FFS10-B34M	16	5/8"	3/4" BSPP	1.42	1.42	1.65	5.39	3.23	2.87
FFS10-S1116F	FFS10-S1116M	16	5/8"	11/16-12 UNF	1.42	1.42	1.65	5.63	3.39	2.95
FFS12-N1F	FFS12-N1M	19	3/4"	1" NPTF	1.61	1.61	1.89	6.38	3.86	3.39
FFS12-B1F	FFS12-B1M	19	3/4"	1" BSPP	1.61	1.61	1.89	6.38	3.86	3.39
FFS12-S1516F	FFS12-S1516M	19	3/4"	15/16-12 UNF	1.61	1.61	1.89	6.30	3.43	3.43
FFS16-N114F	FFS16-N114M	25	1"	1 1/4" NPTF	2.17	2.17	2.17	6.97	4.33	3.54
FFS16-B114F	FFS16-B114M	25	1"	1 1/4" BSPP	2.17	2.17	2.17	6.97	4.33	3.54
FFS16-S158F	FFS16-S158M	25	1"	1 5/8-12 UNF	2.17	2.17	2.17	6.97	4.33	3.54

NOTE: LOCKING SLEEVE STANDARD ON ALL SIZE COUPLERS.

# TECHNICAL DATA – STAINLESS STEEL COUPLINGS

NOMINAL SIZE	ISO SIZE	MAXIMUM WORKING PRESSURE	RATED FLOW	MINIMUM BURST-PLUG	MINIMUM BURST COUPLER	MINIMUM BURST CONNECTED	FLUID SPILLAGE
1/4"	6.3	3625 PSI	4.8 GPM	CF	CF	CF	0.008 cc
3/8"	10	3625 PSI	10.0 GPM	26,100 PSI	15,225 PSI	29,000 PSI	0.010 cc
1/2"	12.5	3625 PSI	19.8 GPM	22,475 PSI	14,790 PSI	18,850 PSI	0.012 cc
5/8"	16	3625 PSI	26.4 GPM	CF	CF	CF	0.015 cc
3/4"	19	3625 PSI	37.0 GPM	CF	CF	CF	0.020 cc
1"	25	3625 PSI	52.8 GPM	CF	CF	CF	0.030 cc

## PERFORMANCE:

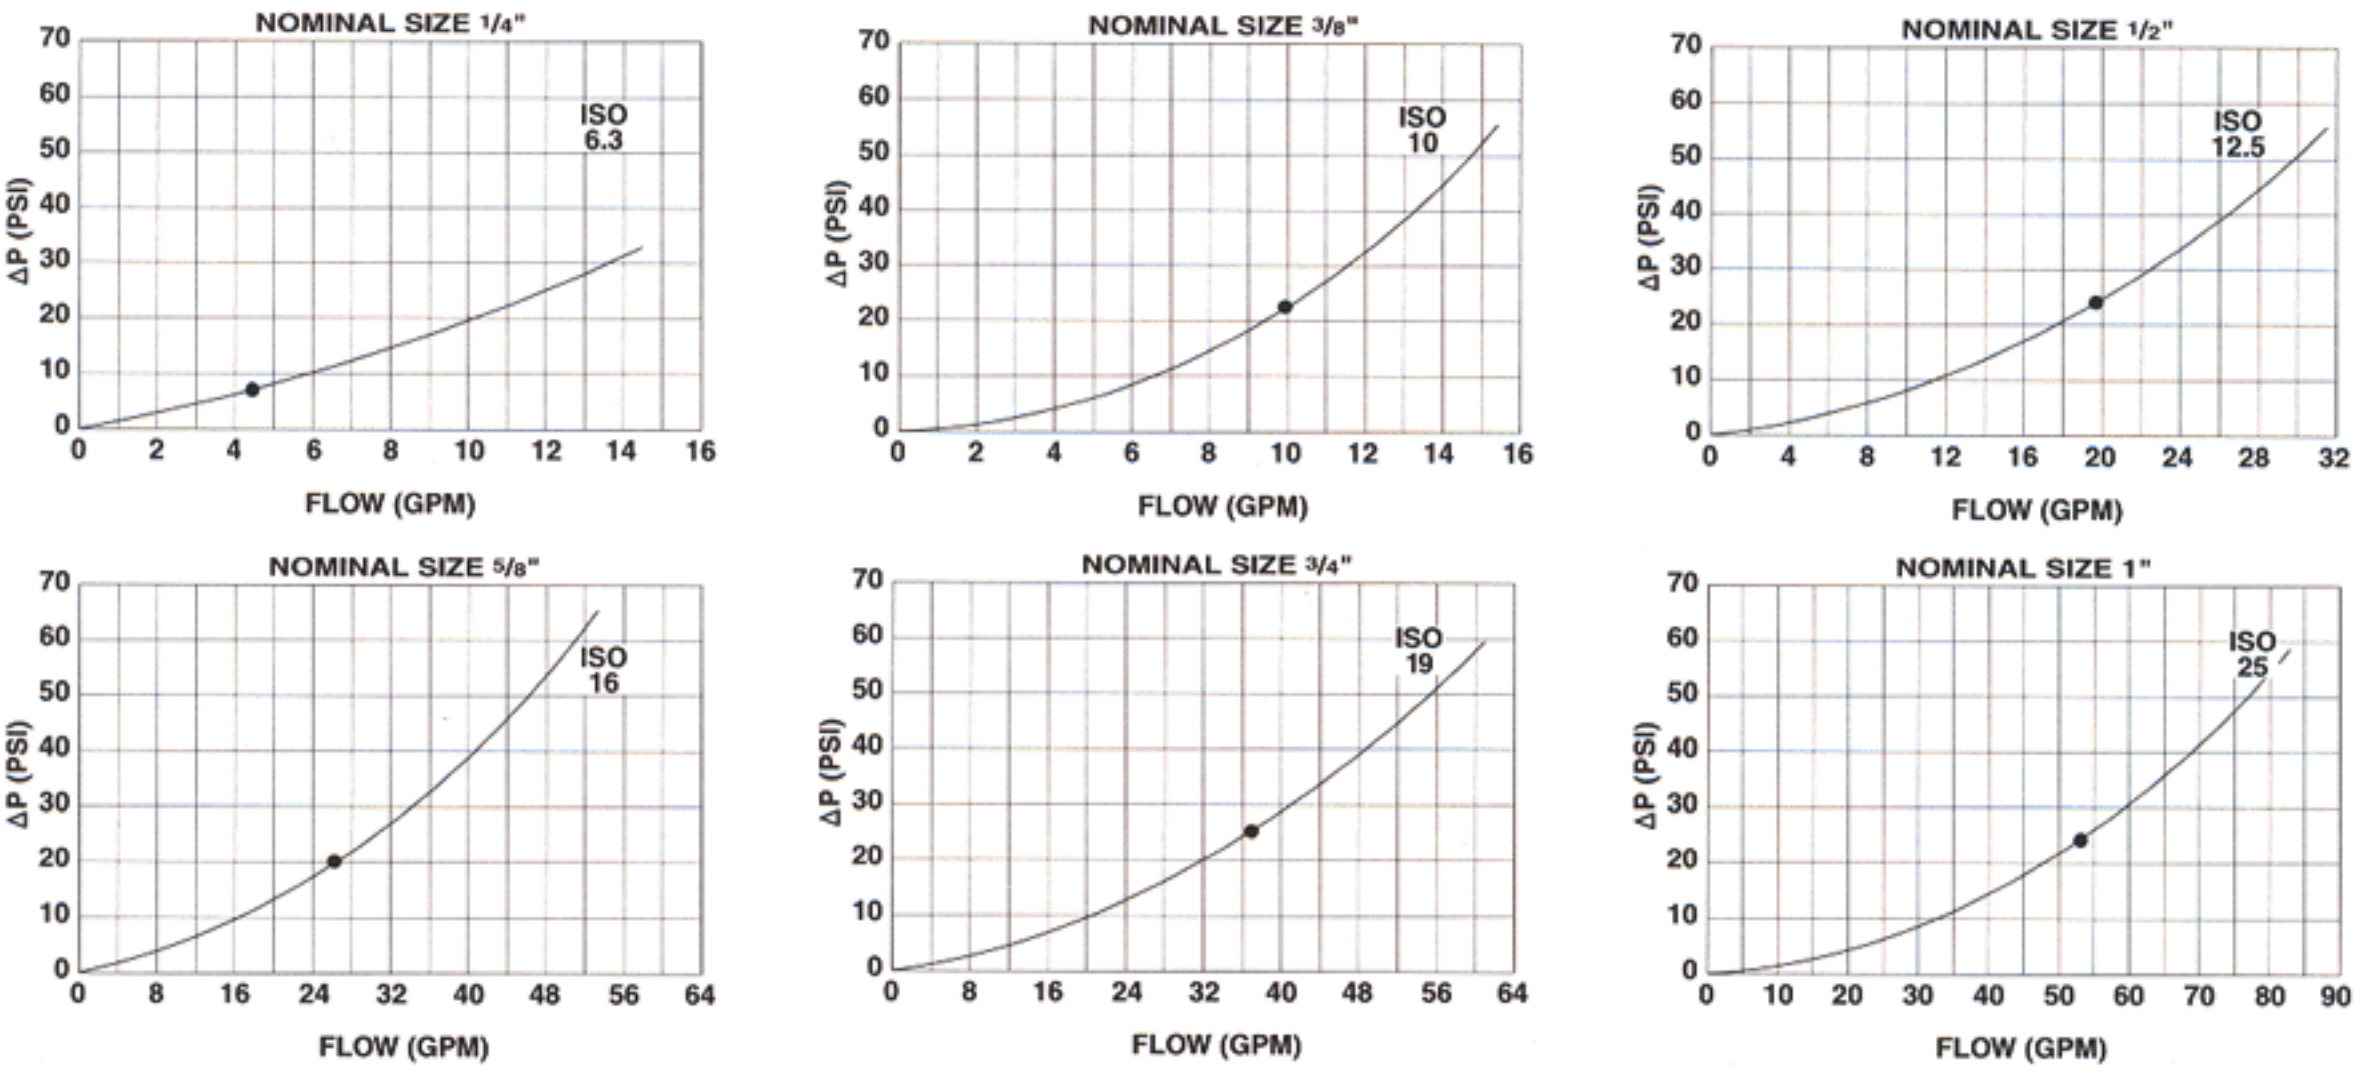

## ACCESSORIES – DUST PROTECTORS


NOMINAL SIZE	ISO SIZE	AUTOMATIC DUST CAP PART NUMBER	COLOR	MATERIAL
3/8"	10	TFFA-38-R	RED	NYLON
3/8"	10	TFFA-38-Y	YELLOW	NYLON
3/8"	10	TFFA-38-G	GREEN	NYLON
3/8"	10	TFFA-38-B	BLUE	NYLON
3/8"	10	TFFA-38-BK	BLACK	NYLON
1/2"	12.5	TFFA-34-R	RED	NYLON
1/2"	12.5	TFFA-34-Y	YELLOW	NYLON
1/2"	12.5	TFFA-34-G	GREEN	NYLON
1/2"	12.5	TFFA-34-B	BLUE	NYLON
1/2"	12.5	TFFA-34-BK	BLACK	NYLON

NOMINAL SIZE	ISO SIZE	MANUAL DUST CAP FOR COUPLER	COLOR	MATERIAL
3/8"	10	FF06-FC	RED	RUBBER
1/2"	12.5	FF08-FC	RED	RUBBER
3/4"	19	FF12-FC	RED	RUBBER

NOMINAL SIZE	ISO SIZE	MANUAL DUST CAP FOR PLUG	COLOR	MATERIAL
3/8"	10	FF06-MC	RED	RUBBER
1/2"	12.5	FF08-MC	RED	RUBBER
3/4"	19	FF12-MC	RED	RUBBER



PRESS FITS ON COUPLER HALF ONLY.

